

Continental 
The Future in Motion



Conti EcoPlus HS3

Fuel Efficient Long Haul Steer

Continental offers the right tire for every application and type of terrain. Whether you need to take the highway, regional roads, city traffic or even venture off road, our premium tires for trucks and buses are engineered to suit your specific application needs.




Conti EcoPlus HS3


Fuel Saving

3G Casing

SmartWay

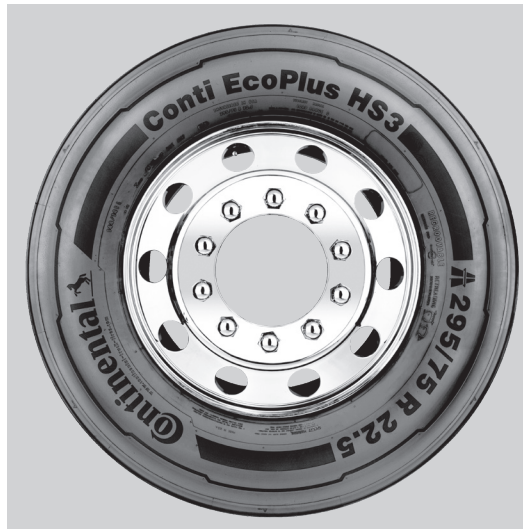

Fuel Efficient Long Haul Steer



- New belt package designed to decrease circumferential deformation and improved wear resulting in increased removal miles.
- Wide platform with 19/32" tread depth for improved mileage.
- Advanced tread compound balances cut and tear resistance with optimized performance and rolling resistance.
- Superior casing construction allows high air dispersion for improved durability and enhanced retreadability.
- Built on the all new Conti3G casing for maximum retreadability.



Applications
Long haul over the highway all position use.

Segment
■ Goods
■ People

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)#	Static Loaded Radius IN (MM)	Overall Inflated Diameter IN (MM)	Overall Inflated Width IN (MM)	Loaded Section Width IN (MM)	Approved Rim(s)	Minimum Dual Spacing IN (MM)	Revs Per Mile (KM)	Tire Weight LB (KG)	MAX. LOAD@INFLATION			
													LBS (KG)	PSI (KPa)		
TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS																
295/75R22.5	H	05110580000	19	75	18.7 (475)	39.9 (1013)	11.4 (290)	12.3 (312)	8.25, 9.00	12.5 (318)	519 (322)	120 (54)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
295/75R22.5	G	05110510000	19	75	18.7 (475)	39.9 (1013)	11.4 (290)	12.3 (312)	8.25, 9.00	12.5 (318)	519 (322)	114 (52)	6175 (2800)	110 (760)	5675 (2575)	110 (760)
11R22.5	H	05110520000	19	75	19.5 (495)	41.8 (1062)	11.7 (296)	13.1 (331)	8.25, 7.50	12.5 (318)	495 (308)	127 (58)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R22.5	G	05110530000	19	75	19.5 (495)	41.8 (1062)	11.7 (296)	13.1 (331)	8.25, 7.50	12.5 (318)	495 (308)	123 (56)	6175 (2800)	105 (720)	5840 (2650)	105 (720)
11R24.5	H	05110560000	19	75	20.4 (518)	43.8 (1113)	11.7 (297)	13.1 (333)	8.25, 7.50	12.5 (318)	472 (293)	138 (63)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
11R24.5	G	05110570000	19	75	20.4 (518)	43.8 (1113)	11.7 (297)	13.1 (333)	8.25, 7.50	12.5 (318)	472 (293)	131 (59)	6610 (3000)	105 (720)	6005 (2725)	105 (720)
285/75R24.5	H	05110540000	19	75	19.3 (490)	41.5 (1054)	11.4 (289)	12.9 (328)	8.25	12.5 (318)	499 (310)	123 (56)	6780 (3075)	120 (830)	6175 (2800)	120 (830)
285/75R24.5	G	05110550000	19	75	19.3 (490)	41.5 (1054)	11.4 (289)	12.9 (328)	8.25	12.5 (318)	499 (310)	120 (54)	6175 (2800)	110 (760)	5675 (2575)	110 (760)

Note - # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

