

CAMSO MPT 753



TELEHANDLERS



COMPACT
WHEEL
LOADERS



MINI-
DUMPERS



THE NEXT GENERATION IN VERSATILITY AND DURABILITY

Engineered to provide enhanced traction in a variety of surface applications without sacrificing ride quality. Excellent overall durability and puncture resistance ensure maximum service life.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO MPT 753



FLAT NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Enhances stability, ride quality and durability

VOID GUARD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

STEPPED AND OPEN SHOULDER LUGS


- Enhances traction on softer surfaces for better versatility

TIRE SIZE	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	APPLI-CATION	MAXIMUM TIRE LOAD [lb]						
		Recom-mended	Alternative	O.D. [in]	O.W. [in]	O.T.D. [32 nd]				Inflation pressure [PSI]	STATIC	3 mph	6 mph	9 mph	19 mph	31 mph
340/80-18 IND (12.5-18; 335/80-18)	TL	11	12; 11 SDC; 12 SDC; W10; W11	39.6	13.8	26	143	A8	CYCLIC	58	13825	10030*	9015**	8045	6425	5465
									CONSTANT	58	13825	8710	7505	6790	6250	5465
340/80-20 IND (12.5-20; 335/80-20)	TL	11	12; 11 SDC; 12 SDC; W10; W11	42.0	14.0	31	144	A8	CYCLIC	58	14200	10305*	9260**	8265	6605	5620
									CONSTANT	58	14200	8950	7715	6980	6415	5620
400/70-20 IND (405/70-20; 16.0/70-20)	TL	13	DW12; 13 SDC; DW13; DW13L; DW14L	43.3	15.9	34	155	A8	CYCLIC	73	19655	14265*	12820**	11455	9140	7770
									CONSTANT	73	19655	12390	10680	9655	8885	7770
400/70-24 IND (405/70-24; 16.0/70-24)	TL	13	DW12; 13SDC; DW13; DW13L; DW14L; TW13; TW14L	46.7	15.8	37	158	A8	CYCLIC	73	21550	15655 *	14055**	12555	10030	8530
									CONSTANT	73	21550	13590	11720	10595	9745	8530
400/80-24 IND (15.5/80-24)	TL	DW13	DW12; DW13L; DW14L; TW13; TW14L	49.0	16.2	42	162	A8	CYCLIC	73	24085	17495*	15710**	14030	11210	9535
									CONSTANT	73	24085	15190	13095	11840	10890	9535
460/70-24 IND (17.5L-24)	TL	DW15L	DW14L; DW16L; TW14L; TW15L; TW16L	49.3	17.8	42	159	A8	CYCLIC	58	22190	16105*	14475**	12930	10320	8775
									CONSTANT	58	22190	13990	12060	10900	10030	8775

* Cyclic: One way distance up to 500 feet

** Cyclic: One way distance up to 2000 feet

TIRE LIFE

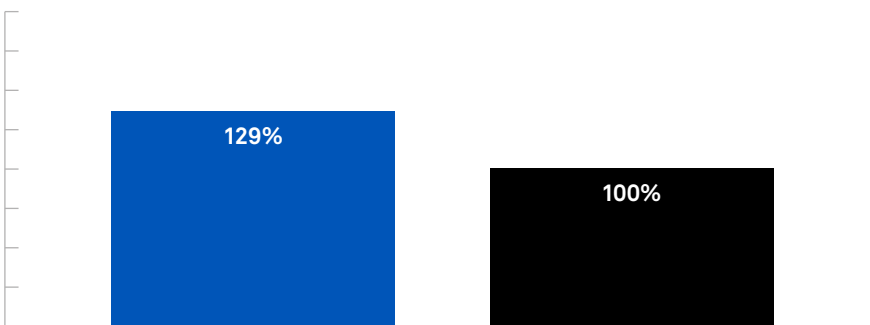

CAMSO MPT 753

SOLIDEAL 4L I3

Due to better rubber compound and an optimized tread design, Camso MPT 753 demonstrated 29% better life performance compared to Solideal 4L I3 in controlled conditions.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL