




SOLIDEAL HAULER LT

BY CAMSO



INDUSTRIAL
PNEUMATIC

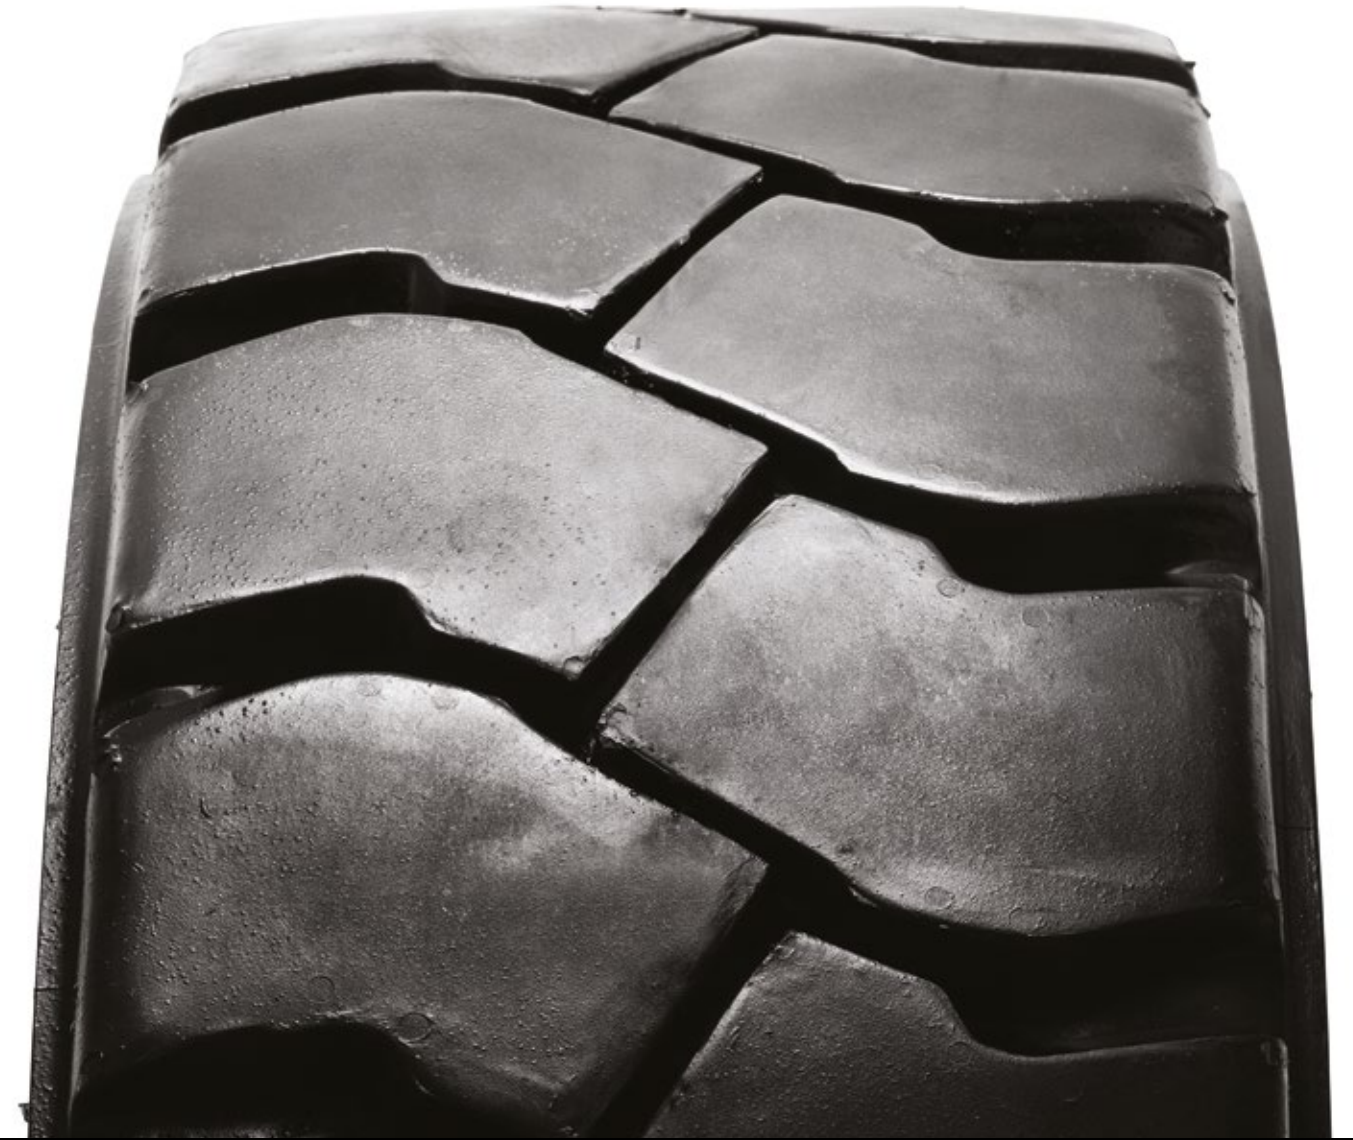

Camso is the best of Camoplast and Solideal.
To keep moving forward while staying true to our history,
we're now the Road Free company.

camso.co



FORMERLY
CAMOPLAST
SOLIDEAL

READY FOR YOUR CHALLENGES.

With a heavy-duty carcass and high abrasion-resistant tread, it delivers both incredible puncture resistance and long life. And with a reinforced sidewall for side impact protection, it's unstoppable.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



STABILITY



FORMERLY
CAMOPLAST
SOLIDEAL

SOLIDEAL HAULER LT

BY CAMSO

TIRE SIZE	PR	TUBE* & VALVE**	FLAP	RIM SIZE ⁽¹⁾		ACTUAL TIRE DIMENSIONS				INFLATION PRESSURE (psi)	LOAD INDEX & SPEED SYMBOL	LOAD CAPACITY ⁽²⁾ Counterbalanced lift trucks (lbs)				
				Recommended	Alternative	Overall diameter (in)	Section width (in)	Original tread depth (in)	Static loaded radius (in)			Up to 16 mph		Up to 20 mph		
												Load wheel	Steering wheel	Load wheel	Steering wheel	
5.00-8 (5.70-8)	10	JS2	90-8	3.00D	3.25I/3.75I	18.1	5.2	0.6	8.2	145.0	111	A5	3120	2403	3009	2238
16x6-8 (150/75-8)	16	V3-02-05	130-8	4.33R	-	16.6	5.8	0.5	7.5	145.0	113	A5	3296	2535	3175	2348
18x7-8 (180/70-8)	16	V3-02-05	130-8	4.33R	5.00F	18.6	6.5	0.7	8.3	145.0	125	A5	4729	3638	4552	3384
6.00-9	10	JS2	125-9	4.00E	-	21.1	6.6	0.6	9.6	123.3	118	A5	3781	2910	3638	2712
6.00-9	12	JS2	125-9	4.00E	-	21.4	6.5	0.6	9.6	145.0	121	A5	4156	3197	4001	2976
21x8-9 (200/75-9)	16	JS2	180-9	6.00E	7.00E	21.5	7.8	0.7	9.4	145.0	134	A5	6074	4674	5842	4343
6.50-10	10	JS2	140-10	5.00F	5.50F	23.3	7.2	0.6	10.7	112.4	122	A5	4299	3307	4134	3075
6.50-10	14	JS2	140-10	5.00F	5.50F	23.4	7.1	0.6	10.6	145.0	128	A5	5159	3968	4960	3693
23x9-10 (225/75-10)	20	JS2	180-10	6.50F	-	22.8	9.3	0.6	10.3	145.0	142	A5	7595	5842.19	7308	5434
7.00-12	12	TR75A	135-12	5.00S	-	26.8	7.6	0.7	12.2	123.3	133	A5	5908	4541	5677	4222
7.00-12	14	TR75A	135-12	5.00S	-	26.8	7.7	0.7	12.2	130.5	134	A5	6074	4674	5842	4343
7.00-12	16	TR75A	135-12	5.00S	-	26.9	7.7	0.7	12.2	145.0	136	A5	6415	4938	6173	4597
23x10-12 (250/55-12)	16	JS2	210-12	8.00G	-	23.8	9.7	0.7	10.8	141.4	143	A5	7793	6008	7507	5589
27x10-12 (250/75-12)	24	V3-02-05	210-12	8.00G	-	26.5	9.8	0.9	12.0	130.5	152	A5	12180	9370	11717	8719
7.00-15	14	TR75A	180-15	5.50	5.00	28.9	7.5	0.9	13.1	130.5	141	A5	7385	5677	7099	5280
7.50-15	14	TR75A	180-15	6.00	5.50/6.50	30.7	8.3	0.8	14.0	134.2	144	A5	8025	6173	7716	5743
28x9-15 (8.15-15 & 225/75-15)	14	V3-02-08	180-15 HD	7.00	-	27.8	8.6	0.7	12.7	130.5	145	A5	8311	6393	7992	5941
8.25-15 (7.50-15(32))	14	TR77A	180-15	6.50	6.00/7.00	33.1	9.7	0.7	15.0	116.0	149	A5	9314	7165	8962	6669
8.25-15 (7.50-15(32))	16	TR77A	180-15	6.50	6.00/7.00	33.1	9.7	0.9	15.0	134.2	152	A5	10174	7826	9788	7275
8.25-15 (7.50-15(32))	18	TR77A	180-15	6.50	6.00/7.00	33.1	9.7	0.7	15.0	134.2	152	A5	10461	8047	10064	7485
250-15 (250/70-15)	16	TR77A	180-15 HD	7.50	7.00	29.3	8.9	0.7	13.3	119.7	150	A5	9601	7385	9237	6867
250-15 (250/70-15)	20	TR77A	180-15 HD	7.50	7.00	28.9	9.1	0.9	13.3	145.0	155	A5	11111	8543	10681	7904
28x12.5-15 (355/45-15)	24	V3-02-10	260-15	9.75	-	27.4	11.5	0.7	12.4	145.0	161	A5	13261	10196	12743	9480
300-15 (315/70-15)	18	TR78A	180-15 HD	8.00	-	33.5	10.9	1.0	15.1	116.0	161	A5	13261	10196	12743	9480
300-15 (315/70-15)	22	TR78A	180-15 HD	8.00	-	32.8	11.1	1.0	14.8	137.8	163	A5	14760	11354	14198	10560
32x12.1-15	24	TR78A	260-15	9.75	-	31.7	12.4	1.1	13.9	145.0	170	A5	17196	13228	16535	12302
315/85-15	20	TR78A	180-15 HD	7.50	-	35.7	11.4	1.0	15.6	137.8	172	A5	18056	13889	17361	12853
10.00-20	16	V3-02-14	200-20	7.50	7.00/8.00	42.8	11.1	1.2	19.5	130.5	164	A5	14330	11023	13779	10251
11.00-20	16	V3-02-14	200-20	8.00	7.50/8.50	42.9	11.9	1.2	20.0	130.5	167	A5	15620	12015	15024	11177
11.00-20	18	V3-02-14	200-20	8.00	7.50/8.50	42.9	11.9	1.3	19.5	145.0	170	A5	17196	13228	16535	12302
12.00-20	20	V3-02-14	200-20	8.50	8.00/9.00	45.3	12.5	1.4	20.4	145.0	176	A5	20350	15650	19565	14485
12.00-20	28	V3-02-14	200-20	8.50	8.00/9.00	45.3	12.7	1.4	20.6	145.0	176	A5	20350	15650	19565	14485
14.00-24	28	V3-02-7	250-24	10.00	W/VA/WI	53.7	14.6	2.0	24.5	145.0	186	A5	27227	20944	26180	19378
16.00-25	32	TBLS	-	-	13.00/2.0	58.0	16.6	2.2	26.1	145.0	195	A5	34822	26786	33488	24912

WIDE SQUARE TREAD PROFILE

- Provides superior stability

MASSIVE TREAD BLOCKS AND DEEP LUGS

- Extends service life in severe applications



WIDE SIDEWALL WITH RIM GUARD

- Provides best side impact resistance
- Three times thicker than standard tires

REINFORCED UNDERTREAD

- Increases puncture resistance

AVAILABLE IN NON-MARKING COMPOUND UPON REQUEST

Remarks

- Consult tire and wheel manufacturer for confirmation of the suitability of the tire/rim combination particularly with regard to rim profile and wheel strength.
- The speeds quoted in the table are the maximum speeds of the unloaded vehicle. An increase in load capacity for lower speeds is not permitted. Loads apply to cyclic service applications. Cyclic service means applications where tires are not used continuously at the load indicated by its Load Index and Speed Symbol. It does not refer to the length of time a vehicle is in use, but rather that there is a variation in load and/or speed.

* Tube size is identical to tire size.

** Table shows standard valves. Other valves on request.

NHS – Not for Highway Service: Tires primarily designed for use outside of public roads, but suitable for temporary/incidental use on public roads.

All tires come with tube and flap.

It is possible that certain items are not sold in your region.

Please contact your local sales contact to check tire availability in your region.

AUTHORIZED DISTRIBUTOR: